


# SubConn® Specials Right Angle 6-8-10 Contacts

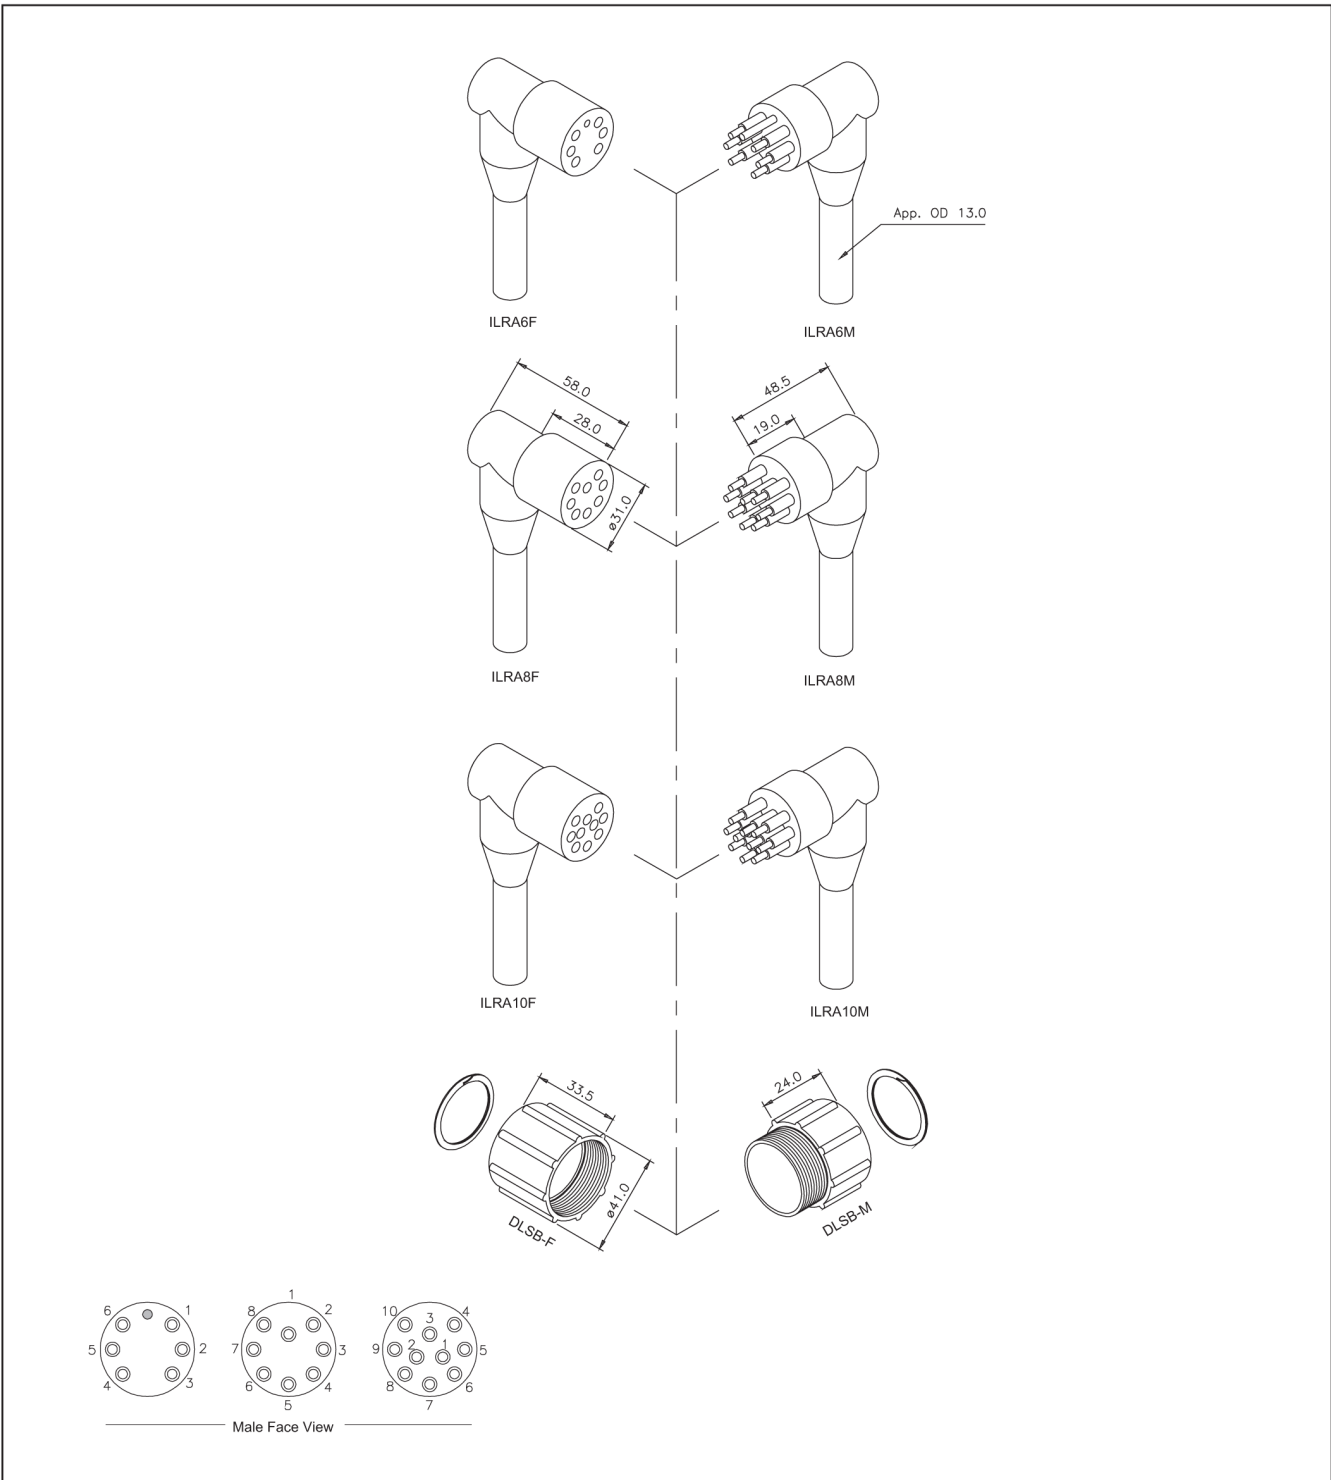

| Inline Cable Colour Code   | Connector Specifications         | Material Specifications  | Dimensions in mm. Threads in inches. 1 inch = 25.4 mm. 1 mm = 0,03937 inch.   |
|--|----------------------------------|--|---|
| 1 Black<br>2 White<br>3 Red<br>4 Green<br>5 Orange<br>6 Blue<br>7 White/Black<br>8 Red/Black<br>(Bulkhead Leads Number Tagged) | 9 Green/Black<br>10 Orange/Black | Single Contact Rating : 600 V @ 15 Amp<br>Connector Rating 2-4 pins : 600 V @ 10 Amp<br>Connector Rating 5-10 pins : 600 V @ 6 Amp<br>Insulation Resistance : >200 megaohm<br>Contact Resistance : <0,01 ohm<br>Wet Matings : >500<br>Temp. Rating : -4° to +60° C<br>: 25° to 140° F<br>Depth Rating : 1.400 bar - 20.000 psi | Connector Body : Neoprene (CR)<br>Contacts : Brass UNS-C36000<br>Location pin : AISI 303<br>Locking Sleeve : Delrin<br>Snap Ring : AISI 302<br>Inline Cable (60 cm) : 16 AWG 1,34 mm <sup>2</sup> Rubber (6+8 pin)<br>: 18 AWG 1,0 mm <sup>2</sup> Rubber (10 pin)<br>Options : See index pages |
|  |                                  |  | Modification rights reserved<br><br>Drawing No. SE 300-11   |